



Ordering Safehinge ALU Kits

Product coding explained.

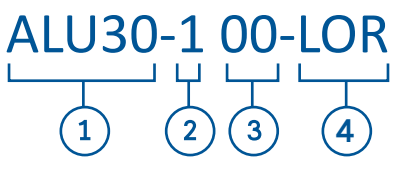


1 Choose kit type

Non-fire rated
FD30
up to 32dB
ALU30-XXX-XXX




FD60
up to 38dB*
ALU60-XXX-XXX

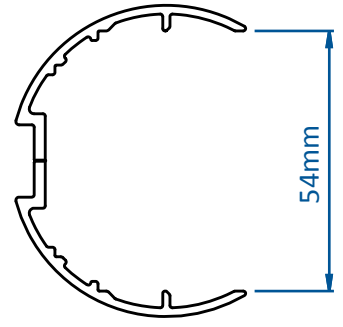


* glazed - see page 37

2 Choose kit length (door height)

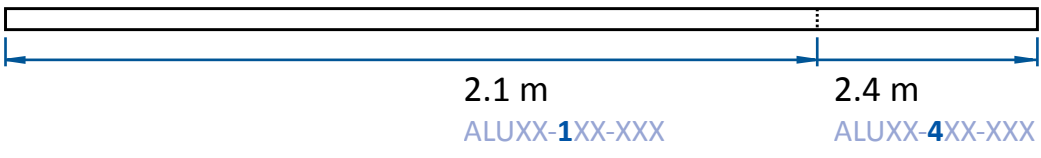


3 Choose bottom pivot


Floor plate
ALUXX-X00-XXX
(standard bearing)
ALUXX-X00LS-XXX
(with long stem bearing)



L-bracket
ALUXX-X50-XXX
(standard bearing)
ALUXX-X50LS-XXX
(with long stem bearing)

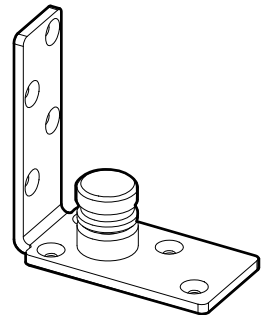

Floor spring (slotted strap)
ALUXX-X26FS-XXX

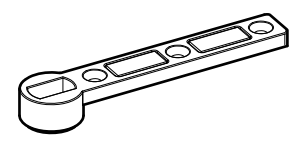

4 Choose intumescent

LORIENT
ALUXX-XXX-LOR

Intumescent Seals
ALUXX-XXX-ISL